

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup> : E21B 7/06, 47/024	A1	(11) International Publication Number: WO 94/28280
		(43) International Publication Date: 8 December 1994 (08.12.94)
(21) International Application Number: PCT/US93/04800		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, CZ (Utility model), DE, DE (Utility model), DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, SK (Utility model), UA, US, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 21 May 1993 (21.05.93)		
(71)(72) Applicant and Inventor: GARDES, Robert, A. [US/US]; P.O. Box 92593, Lafayette, LA 70509 (US).		
(74) Agent: SMITH, Gregory, C.; Pravel, Hewitt, Kimball & Krieger, 10th floor, 1177 West Loop South, Houston, TX 77027-9095 (US).		
Published With international search report.		

(54) Title: METHOD OF DRILLING MULTIPLE RADIAL WELLS USING MULTIPLE STRING DOWNHOLE ORIENTATION

(57) Abstract

A method of drilling radial boreholes (40) from a first borehole (24) without withdrawing the drill string from the hole, by providing a first carrier string (12), a drill string (70) within the carrier string, and a method for orienting the position of the carrier string (12) relative to the position of the inner string (70), so that the strings are co-oriented without the need to retrieve either the carrier string (12) or the inner string (70) from the borehole (24) for drilling consecutive radial wells (40).

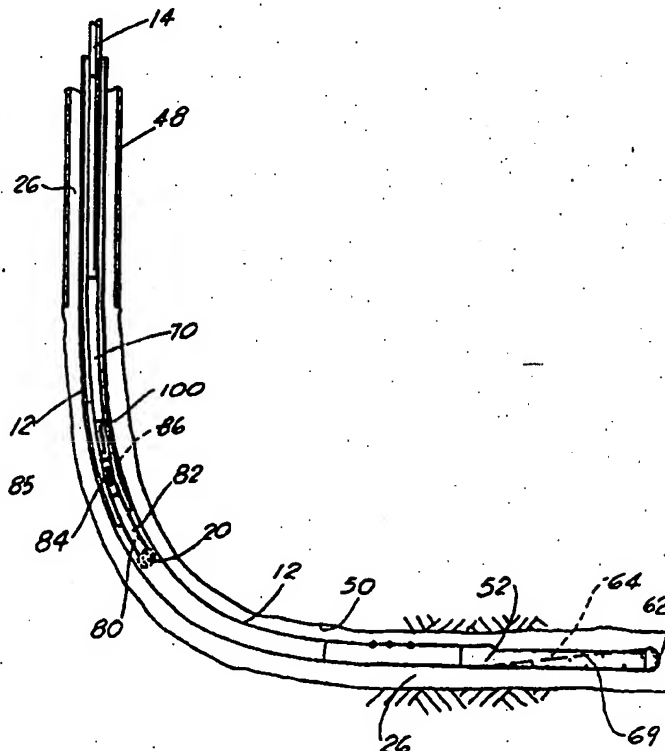

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

-1-

APPLICATION FOR PATENT

5    **INVENTION:**        **METHOD OF DRILLING MULTIPLE RADIAL WELLS  
                         USING MULTIPLE STRING DOWNHOLE  
                         ORIENTATION**

10                                **SPECIFICATION:**

**BACKGROUND OF THE INVENTION:****1. Field Of The Invention:**

                              The method of the present invention relates to  
15    the drilling of radial hydrocarbon and environmental  
                              wells, with offset well bores from vertical, directional or  
                              horizontal orientation. More particularly, the present  
                              invention relates to a drill string carried within a  
                              carrier string, and the method of orienting the two strings  
20    while both strings are downhole so that the strings are  
                              oriented in the same direction for drilling multiple radial  
                              offset well bores without retrieving either string from the  
                              hole.

25                                **2. General Background:**

                              In the field of drilling for gas, oil, or other  
                              hydrocarbons, as well as environmental wells, the drilling  
                              of radial wells is known in the art. For example, when a  
                              rather large pocket of oil or gas is hit in a field,  
30    oftentimes, numerous radial well bores, which are wells  
                              drilled radially off of a vertical, horizontal, or  
                              directional hole, are drilled to maximize the recovery of  
                              the liquid or gaseous hydrocarbons from the site. Such  
                              drilling is undertaken with the use of a steerable motor  
35    assembly consisting of a mud motor assembly of several  
                              types, including an articulated motor, double bent housing,  
                              singular bent housing, or bent sub with motor, which would

-2-

be attached to the bit. The type of mud motor and bent housing utilized will determine the angular configuration of the radial well.

In accomplishing this method, a first straight, directional, or horizontal hole is drilled using conventional techniques. After completion of drilling, the drill string is retrieved from the well bore, and the radial drilling process is now ready to be implemented utilizing a two-string drilling technique. The first drill string is assembled with an upstock (which is a type of whipstock) which is multi-orientable without retrieving from the well bore. This string would now be called the carrier string, since it has the ability to carry another drill string inside of the carrier string. The carrier string is now lowered into the well bore to the site of the radial well bore point of origin. The carrier string is retrieved from the hole, and then a second string, with the upstock on the end, is lowered into the first bore hole. The upstock has an opening in its sidewall, to help guide yet a second, inner drill string therethrough, and begin its radial well bore. However, there are tremendous shortcomings to the present state of the art. The most prevalent is the need to be able to simultaneously orient both the outer and the inner drill strings so that the opening of the upstock ramp and the bent housing motor assembly are aligned. Additionally, the two strings must be oriented in the proper direction.

In the present state of the art, in order to accomplish this, the well is drilled, the first string is retrieved, and a carrier string with a upstock is lowered into position in the original wellbore. The inner string, with the bent housing motor assembly is then lowered into the carrier string, and the drilling process is ready to begin, as this assembly exits off of the upstock ramp and drills the first radial. Usually there are multiple radial wells to be drilled from this first hole. Therefore, after drilling the first radial, the inner string is pulled out

-3-

of the hole, the upstock is retrieved, reset, and re-lowered back into the hole for the second radial. Each subsequent radial is drilled in this manner. Since time is money in drilling oil or gas wells, the time expended in this process is very extensive and the cost is very high.

These time and high cost factors become critical in certain settings. For example, it has been determined that the oil and gas reservoirs which have been abandoned in the United States may contain some 330 billion barrels of hydrocarbons, and some fields leaving some 70% of the hydrocarbons underground due to the poor recovery ability of correct production techniques. Therefore, if greater amounts of oil are to be retrieved in such settings, radial wells are very important to maximize recovery. However, as explained heretofore, the expense and time is almost prohibitive, under the current technology of drilling radial wells.

Therefore, it is critical that there be in the art a method of drilling multiple radial oil, gas, or environmental wells, which cut the time drastically and therefore reduce significantly the cost of drilling such multiple wells from a single first vertical, directional or horizontal well.

In the current state of the art there are numerous patents which address the drilling of radial wells, and these are cited in the Prior Art Statement which will be submitted in the filing of this application.

Other objects of the invention will be obvious to those skilled in the art from the following description of the invention.

#### SUMMARY OF THE PRESENT INVENTION:

The method of the present invention solves the shortcomings in the art in a unique manner. What is provided is a method of providing a first carrier string, a drill string within the carrier string, and a method for orienting the position of the carrier string relative to

-4-

the position of the inner string, so that the strings are co-oriented, without the need to retrieve either the carrier string or the inner drill string from the bore hole for drilling consecutive radial wells. The method includes

5 the steps of drilling a hole with a first drill string; retrieving the first drill string from the drilled hole; attaching a deflection tool, such as a upstock, onto the first string, which becomes known as the carrier string, and lowering it into the drilled hole; lowering a second

10 drill string having a drill bit on its lower end through the bore of the carrier string; lowering a steering tool into the second drill string and upon activation of the steering tool, determining the high side or gyro orientation (in the event there is magnetic interference)

15 of the bent housing on the second drill string and determining a magnetic orientation of the carrier string by artificially creating a magnetic north on the carrier string, either by use of magnets or electromagnetic means; (thus high side or gyro orientation can now be aligned with

20 magnetic orientation and both strings are oriented in the same direction); and providing a magnetic orienting tool associated with the carrier string to orient the carrier string with the orientation of the second drill string so that both strings are oriented in the same direction. The

25 inner drill string, now properly oriented, will then be moved forward through the upstock to drill the radial well. Upon completion of the radial well, the drilling assembly of the second drill string is retrieved back into the carrier string, the second drill string is reoriented to a

30 second preselected orientation with the use of the steering tool, the carrier string is reoriented with the magnetic orienting method, and the second radial hole is drilled. This method is repeated until all radial holes are drilled, without having to withdraw either the drill string or the

35 carrier string from the hole during the process.

Therefore, it is a principal object of the present invention to provide an orientation method of drilling

-5-

multiple radial wells from a single well, without having to retrieve either the carrier string of the drill string from the single well during the process of drilling the multiple wells.

5        It is a further principal object of the present invention to drill a radial well from a first well bore, by orienting both the carrier string and the drill string, while both strings are downhole, and without having to retrieve either string from the hole following the  
10        orientation.

      It is a further object of the present invention to provide a method of drilling a radial well by utilizing a combination of high-side orientation and magnetic orientation for the carrier string and the drill string.

15        It is a further object of the present invention to provide a gyro to orient the drill string when the system is utilized preferably in vertically aligned, cased well where there may be magnetic interference, which the gyro would eliminate;

20        It is a further object of the present invention to provide a method of drilling multiple radial wells from a single wellbore, by orienting the drill string with a steering tool lowered into the string using high side orientation or gyro orientation, and by orienting the  
25        carrier string in relation to the inner string by using magnetic orientation, with the high side or gyro orientation serving as the main orientating means for drilling. The steering tools come with magnetometers, and these are used to allow the drilling assemblies to be  
30        oriented in a magnetic direction North, South, East, and West. What we are doing is creating an artificial north by use of magnets or electromagnets. This is placed in line with the opening of the upstock ramp. So when the steering tool which is in the inner drill string is lowered to a  
35        point where the magnets or electromagnets can now override the earth magnetic forces, the steering tool will now point to the new magnetically induced North which happens to be

-6-

the upstock ramp opening, so that the two strings are orientated in the same direction downhole.

**BRIEF DESCRIPTION OF THE DRAWINGS:**

5 For a further understanding of the nature and objects of the present invention, reference should be had to the following detailed description taken in conjunction with the accompanying drawings, in which like parts are given like reference numerals, and wherein:

10 FIGURE 1 illustrates a typical drill string utilized during drilling of a non-vertical well;

FIGURE 2 illustrates a schematic depiction of a series of radial wells being drilled from the initial non-vertical well in FIGURE 1;

15 FIGURE 3 illustrates the positioning of the carrier string including the upstock within the well casing in the process of the present invention;

FIGURE 4 illustrates a detail view of the upstock utilized in the process of the present invention;

20 FIGURE 5 illustrates the inner drill string positioned within the carrier string in the process of the present invention;

FIGURE 6 illustrates the steering tool positioned within the inner drill string in the process of the present invention;

25 FIGURE 7A - 7D illustrates views of the positioning of the inner drill string within the carrier string in the dual orientation of the two drill strings for radial drilling; and

30 FIGURE 8 illustrates the exiting of the inner drill string from the carrier string in order to drill the radial well.

**DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT:**

35 The method of the present invention is discussed below by reference to the drawings, FIGURES 1 through 8. Turning to FIGURE 1 there is provided a typical drilling system 10.



-7-

System 10 provides a drill string 12 comprised of numerous sections of drill pipe 14 threadably interconnected together at joints 16, to form what is referred to as the "drill string" 12. Drill string 12 is secured to a rotary table 18 on its upper end 19, and includes a drill bit 20 on its lower end 22, which is shown drilling a bore hole 24 into the earth, as the rotary table 18 rotates the string 12. This combination is very well known in the art, and is not novel. In the present invention, the borehole would usually be non-vertical or even horizontal in orientation, as seen in FIGURE 1. Therefore, rather than drilling through the use of the rotating rotary table 18, the drill string 12 would include a mud motor 30 positioned above the drill bit 20, which would rotate the bit 20 without rotating the entire drill string 14. In this manner, by utilizing a steerable bent housing motor or a bent sub 32 above the mud motor 30, the borehole 26 would be arced as seen in FIGURE 1, and could even form a horizontal configuration. This method of drilling is very important, so as to enhance recovery and because of the high cost of recovery if the conventional methods were utilized.

One further step in the drilling process as seen in FIGURE 2, is the ability to drill a series or "radial" wells from either a single horizontal or single vertical borehole. FIGURE 2 illustrates schematically a series of radial boreholes 40 coming off of a principal borehole 26, which when done, would greatly increase the production from a particular hydrocarbon formation 42. However, as described earlier in this application, the time and money involved in such a plurality of radial wells is often prohibitive. However, the method of the present invention reduces the time significantly, since the carrier string does not have to be removed from the borehole and reoriented after each radial is drilled, and hence results in a tremendous monetary saving to the drilling of the multiple radial wells 40.

As illustrated, the method of the present invention

-8-

would provide a first conventional drill string 12, which as seen in FIGURE 3, has drilled a first horizontal borehole 26 to a predetermined depth as needed. The borehole 26 may be cased or un-cased, depending on factors surrounding the drilling. There is represented a metal casing 48 lowered into the borehole to guarantee the integrity of the wall 50 of the borehole 26 during the subsequent process. Following the step of drilling this first borehole 26, the drill string 12 is retrieved from the well, and the borehole 26 remains with the casing as illustrated in FIGURE 3. Next, upon retrieval of the drill string 12 from the borehole 26, the drill bit 20 and bent sub 32 are removed, and a means is threadably secured to the drill string 12 for allowing radial wells to be drilled from this string, now called a "carrier string" 12.

This means would comprise an upstock 52, as seen in FIGURE 4. As seen in the FIGURE, the upstock 52 would include an elongated body portion 54 having a bore 56 substantially therethrough. A first end 58 of the upstock 52 would threadably engage onto the lowest most end of the drill string 12. The second end 60 of the upstock 52 would preferably be rounded at 62 to allow it to slide down the borehole 26. The upstock 52 as seen in FIGURE 4, would include a means for guiding an inner drill string 70 to drill a radial well. This means would include an opening 64 in the wall 66 of the upstock 52 of sufficient space to allow an inner drill string and bit to pass therethrough. Further, there would be provided a guide ramp 69 within the bore 56 of the upstock 52, so that as the bit 20 of the inner string 70 contacted the ramp 68, it would be guided along the ramp surface 67, out of the opening 64 in the wall 66 of upstock 52, and out into the earth to commence the radial borehole. Positioned directly above the upstock 52, along the carrier string, would be a means to establish a magnetic field around the string, this means comprising what is known in the art as a Monell collar 85, as illustrated in FIGURE 5. The one or more Monell collars

-9-

85 further comprise a plurality of magnets 102 or  
electromagnets 102, which are utilized to allow the  
drilling assemblies to be oriented in a magnetic direction  
North, South, East, and West. When the magnets 102 on the  
5 collar 85 are activated, there is created an artificial  
north by use of magnets or electromagnets 102. As will be  
described further, this specific orientation is placed in  
line with the opening 64 of the upstock ramp 69, in  
preparation for lowering of a steering tool provided on an  
10 inner drill string that will be lowered into the bore of  
the carrier string 70, to a point where the magnets 102 or  
electromagnets could then override the earth magnetic  
forces. The steering tool would then point to the new  
magnetically induced North which is actually the upstock  
15 ramp opening 64, so that the carrier string 12 and the  
inner string are orientated in the same direction downhole.

It should be kept in mind that the process of the  
present invention is principally addressing the drilling of  
radial wells which are drilled from a non-vertical, non-  
20 cased borehole. However, often, the radial wells must be  
drilled from a vertical well which may or may not be cased.  
This presents two problems in orientation. First, because  
the well is vertical, the initial orientation is not known  
as would be for a non-vertical well, and thus must be  
25 established. Second, a cased well may involve magnetic  
interference from the metal casing, which would make  
orientation utilizing the Earth's magnetic field  
impossible. Therefore, to overcome these problems, in this  
setting, one could utilize a gyro, which is known in the  
30 art, to both establish the orientation and to avoid any  
magnetic interference. During the discussion of this  
method, there will be references to "high side or gyro"  
orientation which is addressing the method utilized in  
vertical, cased wells as discussed.

35 Turning now to these further steps in the process, as  
seen in FIGURE 5, once the upstock 52 has been placed in  
the borehole 26 to a predetermined depth; for example, 6000

-10-

feet, the drill string 12 on which the upstock 52 is secured downhole is ready to receive an inner drill string 70 which would undertake the actual drilling of the radial wells. Inner drill string 70 would comprise a plurality of drill pipes 14 end to end, comprising the major part of the string. For purposes of the method, the inner string 70 may comprise a continuous length of coil tubing, which would be the equivalent of the plurality of sections of drill pipe 14. Whether the string is drill pipe or coil tubing, there would be provided a certain diameter drill bit 20 at the lower end of the string 70. Above the drill bit 20 there would be provided a mud motor 80, of the type known in the art, to undertake the powering of the rotation of the drill bit. These would be of the type including a bent housing mud motor, either single or double bent, and steerable mud motors. Following angle and direction, they would have the ability to slide and rotate the assembly to maintain the angle and the direction of a predetermined angular orientation depending on the angle of radial well to be drilled. The upper end of the sub 82 would be secured to a mule shoe sub 84, which is a component designed to receive a steering tool lowered on a wireline, which will be described further. These components are critical in orienting the inner drill string 70 and the carrier string 12, and will be described further in the process.

Next in the process, the inner drill string 70, as previously described, is then lowered into the carrier string 12 which has the upstock 52 on its lower end. Through measuring the length of inner drill string 70 lowered into the hole, the inner string 70 is lowered to a position such that the drill bit 20 rests in the bore of the carrier string 12, at some point above the upstock 52, as illustrated in FIGURE 5.

Following this step, FIGURE 6 illustrates a steering tool 90, of the type for example, manufactured by DMI or Sharwell, known in the art, is lowered via a wireline 92 down the bore of inner drill string 70, as depicted in

-11-

FIGURE 5, to the point of the mule shoe 84, where the steering tool 90 is locked in place within a slot 86 in the mule shoe 84.

With the placement of the steering tool 90 engaged  
5 into the mule shoe 84, the steering tool 90 would be activated to show the position of the "high side or gyro orientation " of the inner string 70. Once that orientation has been established, and the inner string is positioned so that the steerable motor assembly is oriented  
10 in the direction of the preselected path, the inner string is then lowered to a point where the steering tool is positioned within the magnetic field of the carrier string magnetic orienting Monell collar 102. The steering tool 90 is then switched to magnetic orientation. The Magnetometers  
15 99 of the steering tool 90 then sense the magnetic field of the carrier string 12 and will then point to North. This artificially induced North is the orientation of the carrier string's upstock opening 64. By rotating the carrier string 12 to align North with high side or gyro,  
20 both strings will now be facing the same direction with the orientation of the inner drill string 70.

The steps in this process are illustrated in FIGURES 7A through 7D. As illustrated in FIGURE 7A, the carrier string 12 has been positioned within the borehole with the  
25 upstock 52 at its lower end, and with the opening 64 in the wall of upstock 52 in no particular orientation at this point in the process. There is also illustrated the magnets 102 positioned in the wall of the Monell collars 85, in the carrier string 12, also illustrated in FIGURE 3.

30 Turning now to FIGURE 7B, as illustrated, the inner drill string 70, includes the bit 20, and the mule shoe 84, having the slot 86 to accommodate the steering tool 90. This string 70 has been lowered to a certain position within carrier string 12. The steering tool 90 is then  
35 locked into slot 86, and one is then ready to select the "high side or gyro orientation" of the inner drill string 70. As was discussed earlier, the steering tool 90 includes

-12-

magnetometers which, when activated, sense the magnetic field of the magnets 102 in carrier string 12. After the steering tool 90 is activated, it senses a straight up high side or gyro orientation as seen in FIGURE 7B.

5       FIGURE 7C illustrates that it has been determined that a radial wellbore will be drilled 30 degrees to the right of high side or gyro. In FIGURE 7C, the inner drill string 70 is illustrated as rotated to 30 degrees right of high side or gyro by arrow 87. Following this initial  
10       orientation, the steering tool 90 carried by the inner string 12 is then activated for magnetic orientation. The magnetometers 99 of steering tool 90, once activated, will point to North or an artificially induced North, created by magnets 102 of Monell collars 85. At this point, the  
15       magnetometers 99 of the steering tool 90 will sense the magnets 102 located on the Monell drill collar 85 as shown by the phantom lines 103 of FIGURE 7C as the Magnetic North orientation. The carrier string 12 can then be rotated in the direction of arrow 89 to align the magnets 102 with the  
20       orientation of the magnetometers 99 of steering tool 90. Therefore, as seen in FIGURE 7D, the two strings are aligned precisely in the same orientation, so that the inner string 70 may be then allowed to drill through the opening 64 in the upstock 52 in the preselected 30 degree  
25       orientation.

Very crucial to the process is the fact that this dual orientation between the carrier string 12 and the inner drill string 70 can be accomplished without ever having to retrieve either string from the borehole 26.

30       Therefore, as illustrated in FIGURE 8, following the drilling of the first radial bore 40, the inner drill string is ready to be retrieved back into the bore of the carrier string 12, in the position as seen in FIGURE 5; the operator orients, via the power swivel, the inner string 70  
35       to the next "high side or gyro orientation" selected. Once the high side or gyro orientation is in place, the magnetometers 99 within the steering tool 90, are

-13-

activated. The carrier string 12 is rotated so that the magnetometers 99 sense the artificially induced North orientation as Magnetic North, and the two strings are again aligned for the drilling of the second radial. This process can be repeated indefinitely, and a plurality of radial holes can be drilled without ever returning either of the strings to the surface.

Glossary of Terms

drilling system 10  
10 drill or carrier string 12  
drill pipe 14  
joints 16  
rotary table 18  
upper end 19  
15 drill bit 20  
lower end 22  
bore hole 24  
non-vertical borehole 26  
mud motor 30  
20 bent sub 32  
radial boreholes 40  
hydrocarbon formation 42  
casing 48  
wall 50  
25 upstock 52  
body portion 54  
bore 56  
first end 58  
second end 60  
30 rounded portion 62  
opening 64  
wall 66  
guide ramp 68  
ramp surface 69  
35 inner drill string 70  
mud motor 80  
bent sub 82

-14-

mule shoe sub 84  
Monell collar 85  
slot 86  
arrow 87  
5 steering tool 90  
wireline 92  
magnetometers 99  
magnetic field 101  
magnets 102  
10 phantom line 103

Because many varying and different embodiments may be made within the scope of the inventive concept herein taught, and because many modifications may be made in the  
15 embodiments herein detailed in accordance with the descriptive requirement of the law, it is to be understood that the details herein are to be interpreted as illustrative and not in a limiting sense.  
What is claimed as invention is:



-15-

**CLAIMS:**

1. A method of drilling radial wells, comprising the following steps:

a) drilling a borehole with a first drill string;

b) retrieving the first drill string from the drilled borehole;

c) attaching a deflection means onto a carrier string and lowering it into the drilled hole to a preselected depth;

d) lowering an inner drill string having a mud motor drilling assembly on its lower end through the bore of the carrier string to a preselected depth within the carrier string;

e) lowering a first orienting means into the inner drill string and, upon activation of the first orienting means, determining the orientation of the mud motor drilling assembly of the inner drill string; and

f) providing a second orienting means associated with the inner drill string to orient the carrier string with the orientation of the inner drill string so that both strings are in the same orientation.

2. The method in Claim 1, wherein the deflection means comprises an upstock positioned at the lower end of the carrier string.

3. The method in Claim 1, wherein the inner drill string includes a mud motor for driving the rotation of the drill bit.

4. The method in Claim 1, wherein the first orientation means comprises a steering means to determine the high side or gyro orientation of the mud motor drilling assembly.

5. The method in Claim 1, wherein the second orientation means comprises magnetic sensors within the first steering means.

6. The method in Claim 6, wherein the magnetic

-16-

orientation system positions itself in line with the high side or gyro orientation of the inner drill string.

7. The method in Claim 1, wherein the carrier string is positioned to align with the high side or gyro orientation by rotating the rotary table.

8. The method in Claim 1, wherein an inner drill string of sections of drill pipe is oriented by a power swivel means, or an inner drill string of coil tubing is oriented by the rotating means for a coil tubing system.

9. The method in Claim 1, wherein carrier string is oriented magnetically with the inner string following the high side or gyro orientation of the inner string.

10. The method in Claim 1, wherein the magnets or electromagnets attached to the carrier string creates a magnetic field which is sensed as being Magnetic North by the magnetic sensors of the steering tool in the inner drill string.

11. The method in Claim 1, wherein the drilling will commence when the magnetic orientation has aligned itself with the high side or gyro orientation, so that the opening in the upstock and the orientation of the mud motor are similarly oriented.

12. A method of drilling radial wells, comprising the following steps:

a) drilling a borehole with a first drill string;

b) retrieving the first drill string from the drilled borehole;

c) attaching a deflection means onto a carrier string and lowering the carrier string into the drilled hole to a preselected depth;

d) lowering a second drill string having a drill bit on its lower end through the bore of the carrier string to a preselected depth within the carrier string, inner drill string including a means for accommodating a first orientating means within its bore, and a means for aligning the first orientating means to the deflecting

-17-

angle of the inner drill string;

e) lowering and securing the first orientating means into the inner drill string and upon activation of the steering means, determining the high side or gyro orientation of the drill bit on the inner drill string;

f) next, activating the magnetic sensing means of the first orientating means inside the inner string, so that upon activating the magnetic sensing means, the magnetic sensing means senses the artificially induced North and associates it as Magnetic North; and

g) aligning the sensed Magnetic North with the high side or gyro orientation of the inner drill string so that the magnetic sensing means aligns itself with the high side or gyro orientation of the inner string to provide alignment between the two strings.

13. A method of drilling radial wells, comprising the following steps:

a) drilling a borehole with a first drill string;

b) retrieving the first drill string from the drilled borehole;

c) lowering a carrier string having a deflection tool on its end, and lowering the string into the drilled hole to a preselected depth;

d) lowering an inner drill string having a drill bit on its lower end through the bore of the carrier string to a preselected depth within the carrier string;

e) providing a means on the inner drill string to adapt a steering tool to the inner drill string, and a means to magnetically sense orientation;

f) lowering and securing the steering means into the second drill string and upon activation of the steering means, determining the high side or gyro orientation of the drill bit on the inner drill string;

g) activating the magnetic sensing means, for sensing the position of carrier string orientation as Magnetic North;

-18-

h) aligning the magnetic sensing means with the high side or gyro orientation of the inner drill string so that the magnetic sensing means aligns itself with the high side or gyro orientation of the string to provide alignment between the two strings;

i) drilling a radial well with the inner string off of the deflection means to a preselected depth; and

j) retrieving the inner drill string back into the carrier string and repeating steps e) through i) above.

14. The method in Claims 12 or 13, wherein the deflection means comprises an upstock positioned at the lower end of the first drill string.

15. The method in Claims 12 or 13, wherein the second drill string includes a mud motor for driving the rotation of the drill bit.

16. The method in Claims 12 or 13, wherein the first orientation means comprises a high side or gyro orientation system.

17. The method in Claims 12 or 13, wherein the second orientation means comprises a magnetic orientation system.

18. The method in Claims 12 or 13, wherein the magnetic orientation system positions itself in line with the high side or gyro orientation of the inner drill string.

19. The method in Claims 12 or 13, wherein the carrier string is rotated and positioned by rotating the rotary table.

20. The method in Claims 12 or 13, wherein an inner drill string of sections of drill pipe is oriented by a power swivel means, and an inner drill string of coil tubing is oriented by the rotating means for a coil tubing system.

21. The method in Claims 12 or 13, wherein the carrier string is oriented magnetically with the inner string following the high side or gyro orientation of the inner string.

22. The method in Claims 12 or 13, wherein magnets or

-19-


electromagnets create an artificially induced Magnetic North which is the means by which the magnetic orientation senses its position relative to the high side or gyro orientation.

23. The method in Claims 12 or 13, wherein the drilling will commence when the magnetic orientation has aligned itself with the high side or gyro orientation, so that the opening in the upstock and the orientation of the drill bit are similar.


24. A method of drilling radial wells, comprising the following steps:


- a) drilling a borehole with a first drill string;
- b) retrieving the first drill string from the drilled borehole;
- c) attaching a deflection means onto a carrier string and lowering it into the drilled hole to a preselected depth;
- d) lowering an inner drill string having a mud motor drilling assembly on its lower end through the bore of the carrier string to a preselected depth within the carrier string;
- e) lowering orienting means into the inner drill string;
- f) activating orienting means, to orient the mud motor drilling assembly of the inner drill string and the carrier string so that both strings are in the same orientation;
- g) drilling a radial bore with the inner drill string; and
- h) retrieving the inner drill string back into the carrier string and reorienting the mud motor drilling assembly of the inner drill string and the carrier string to drill each subsequent radial bore.

1/7

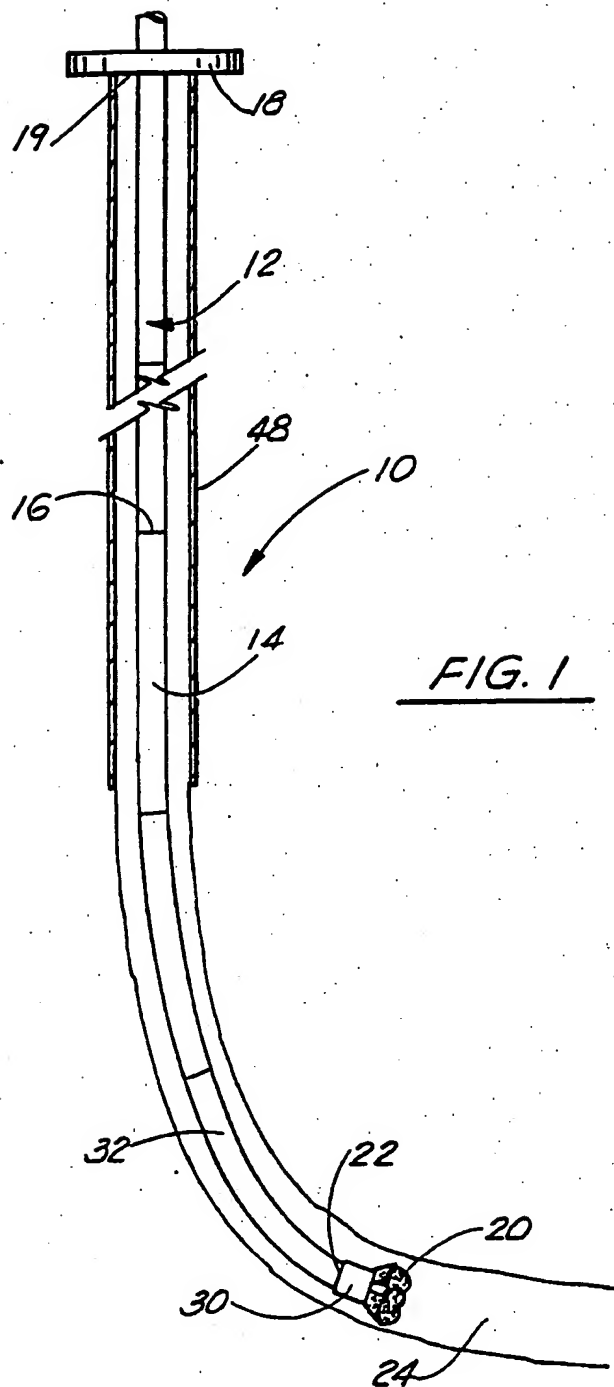


SUBSTITUTE SHEET

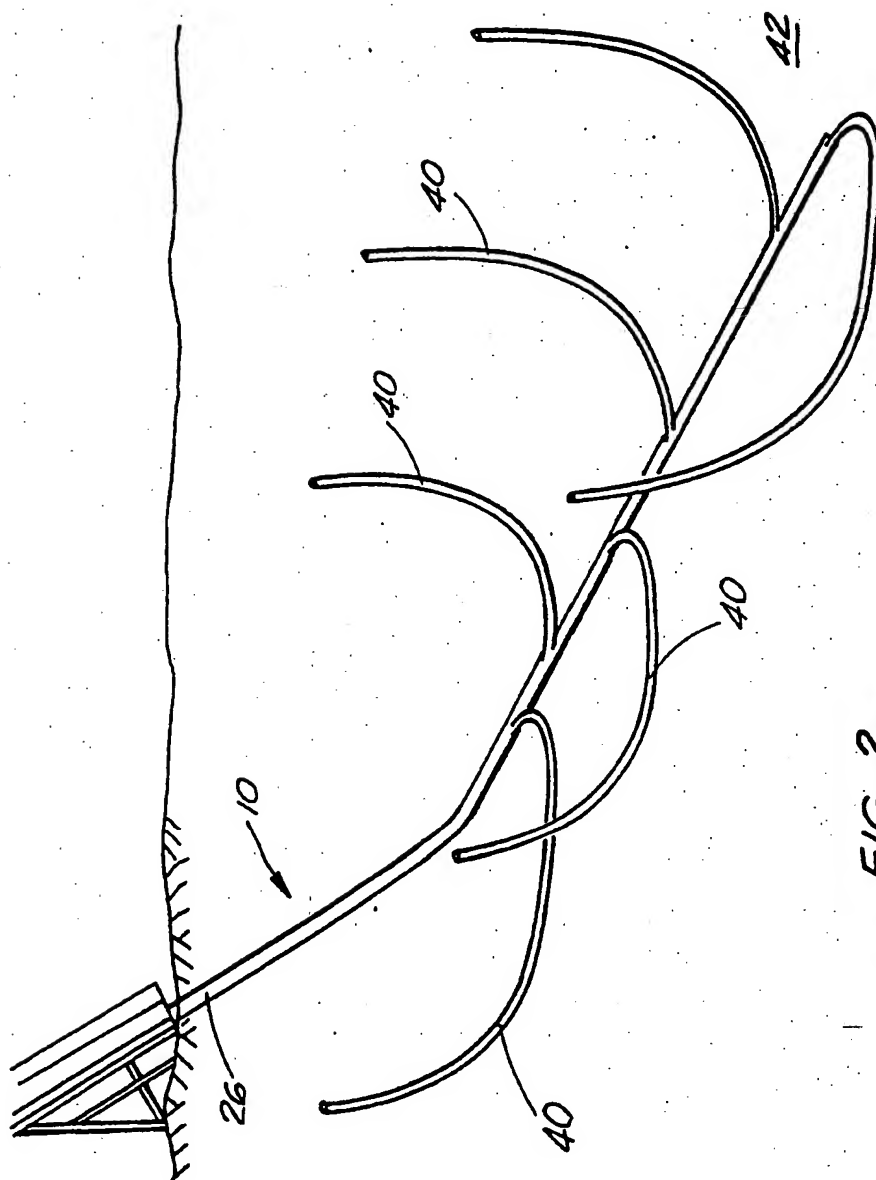

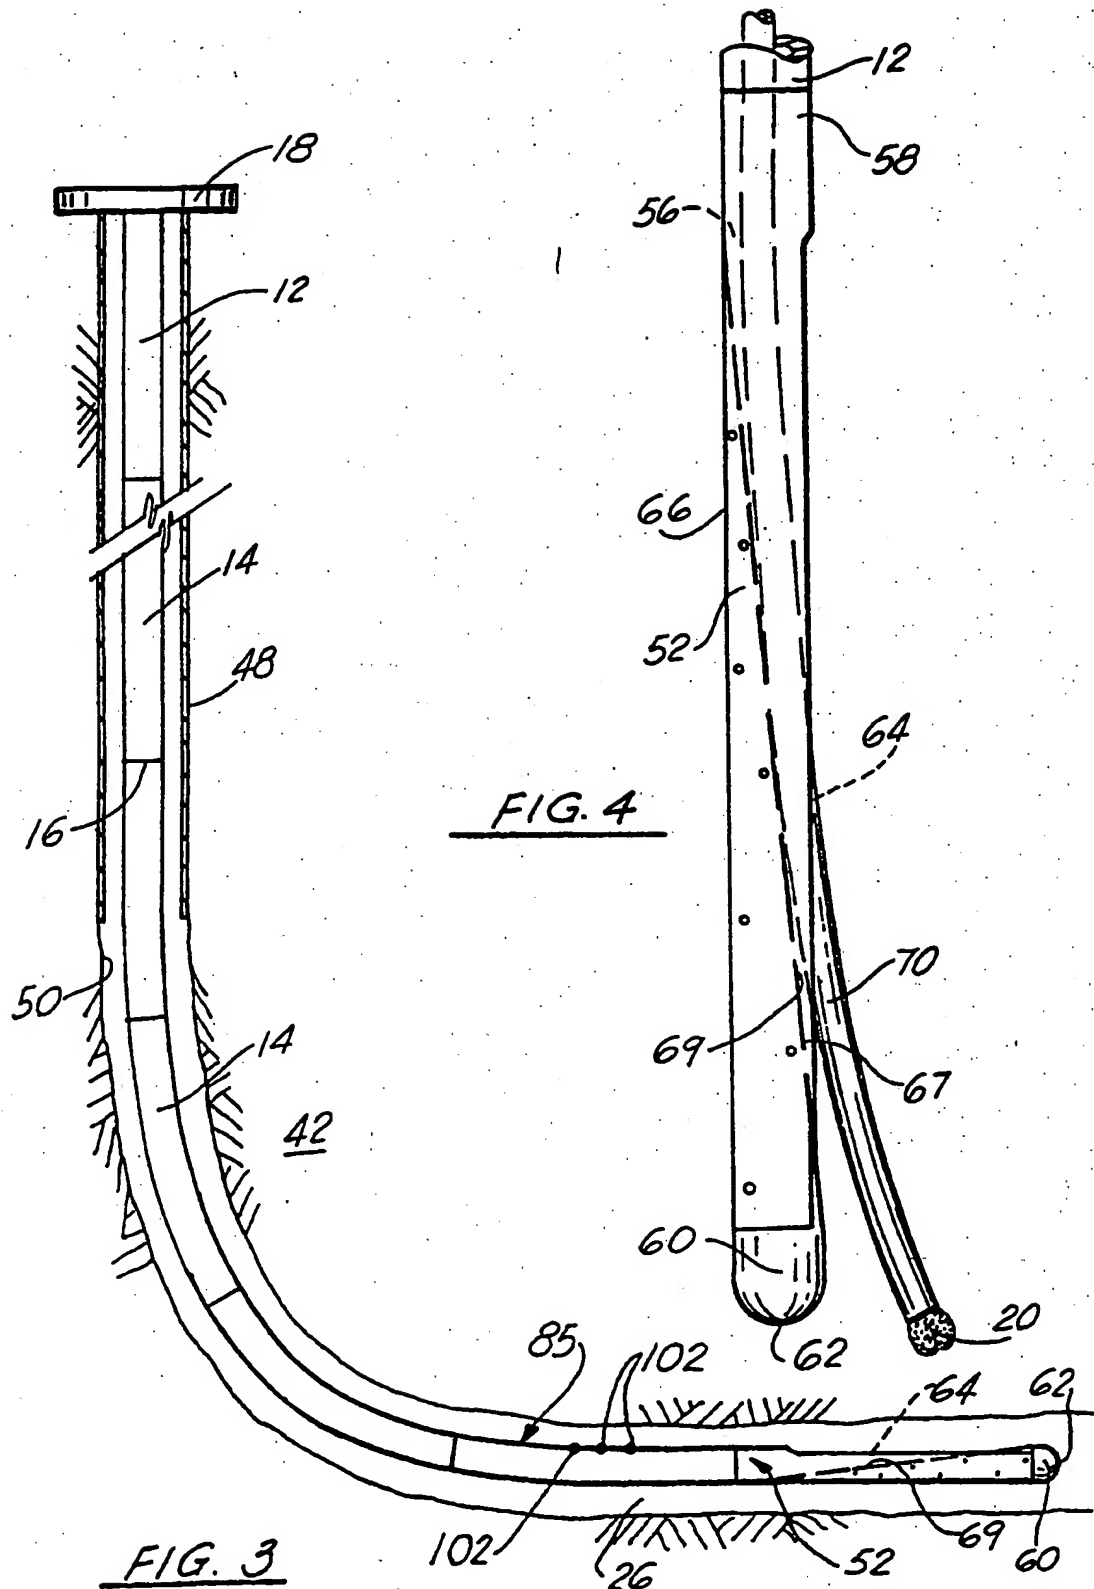



4/7

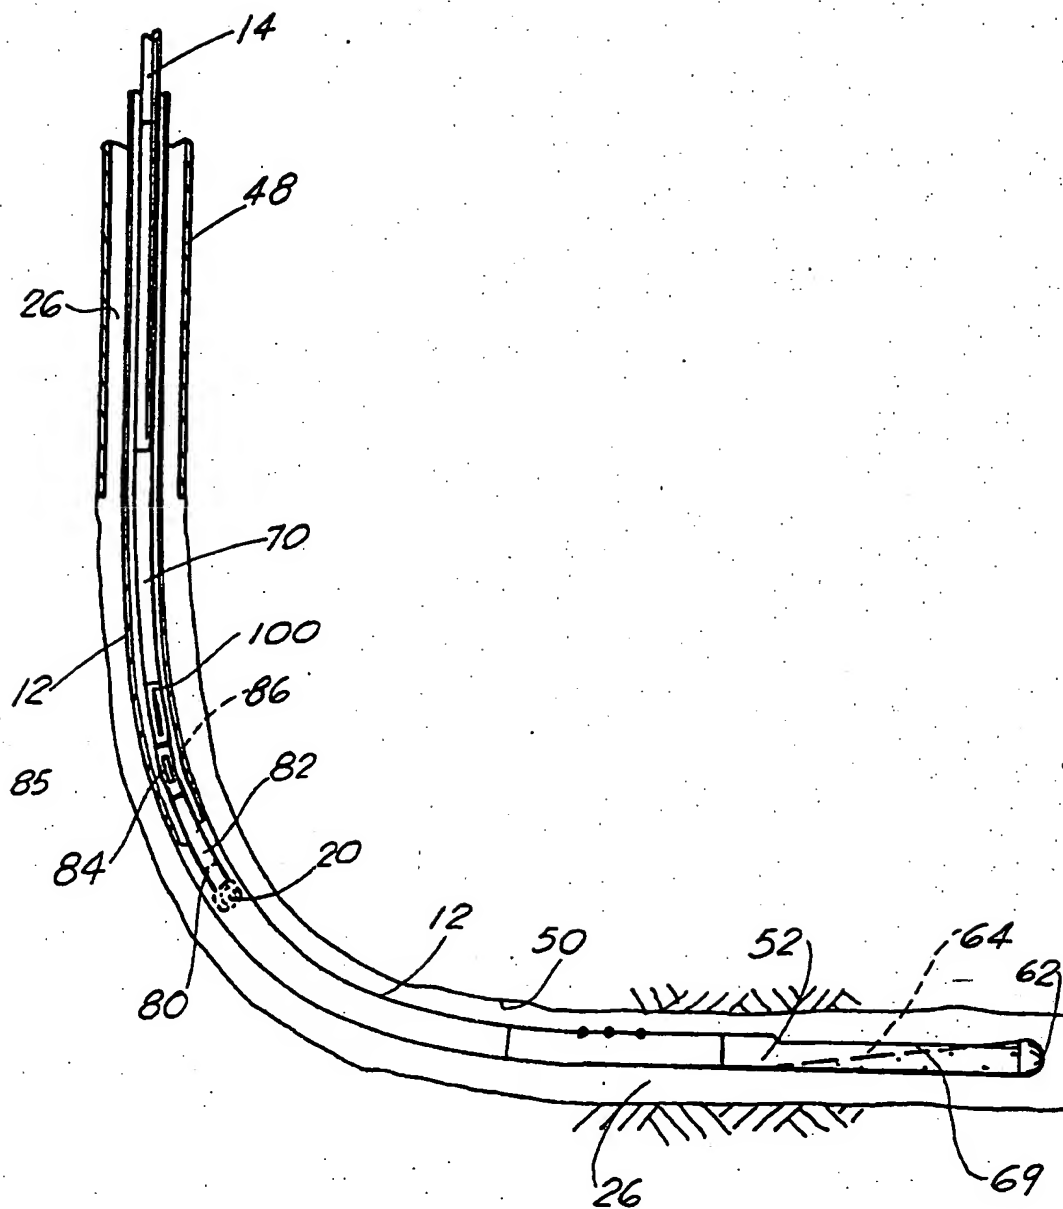FIG. 5

SUBSTITUTE SHEET

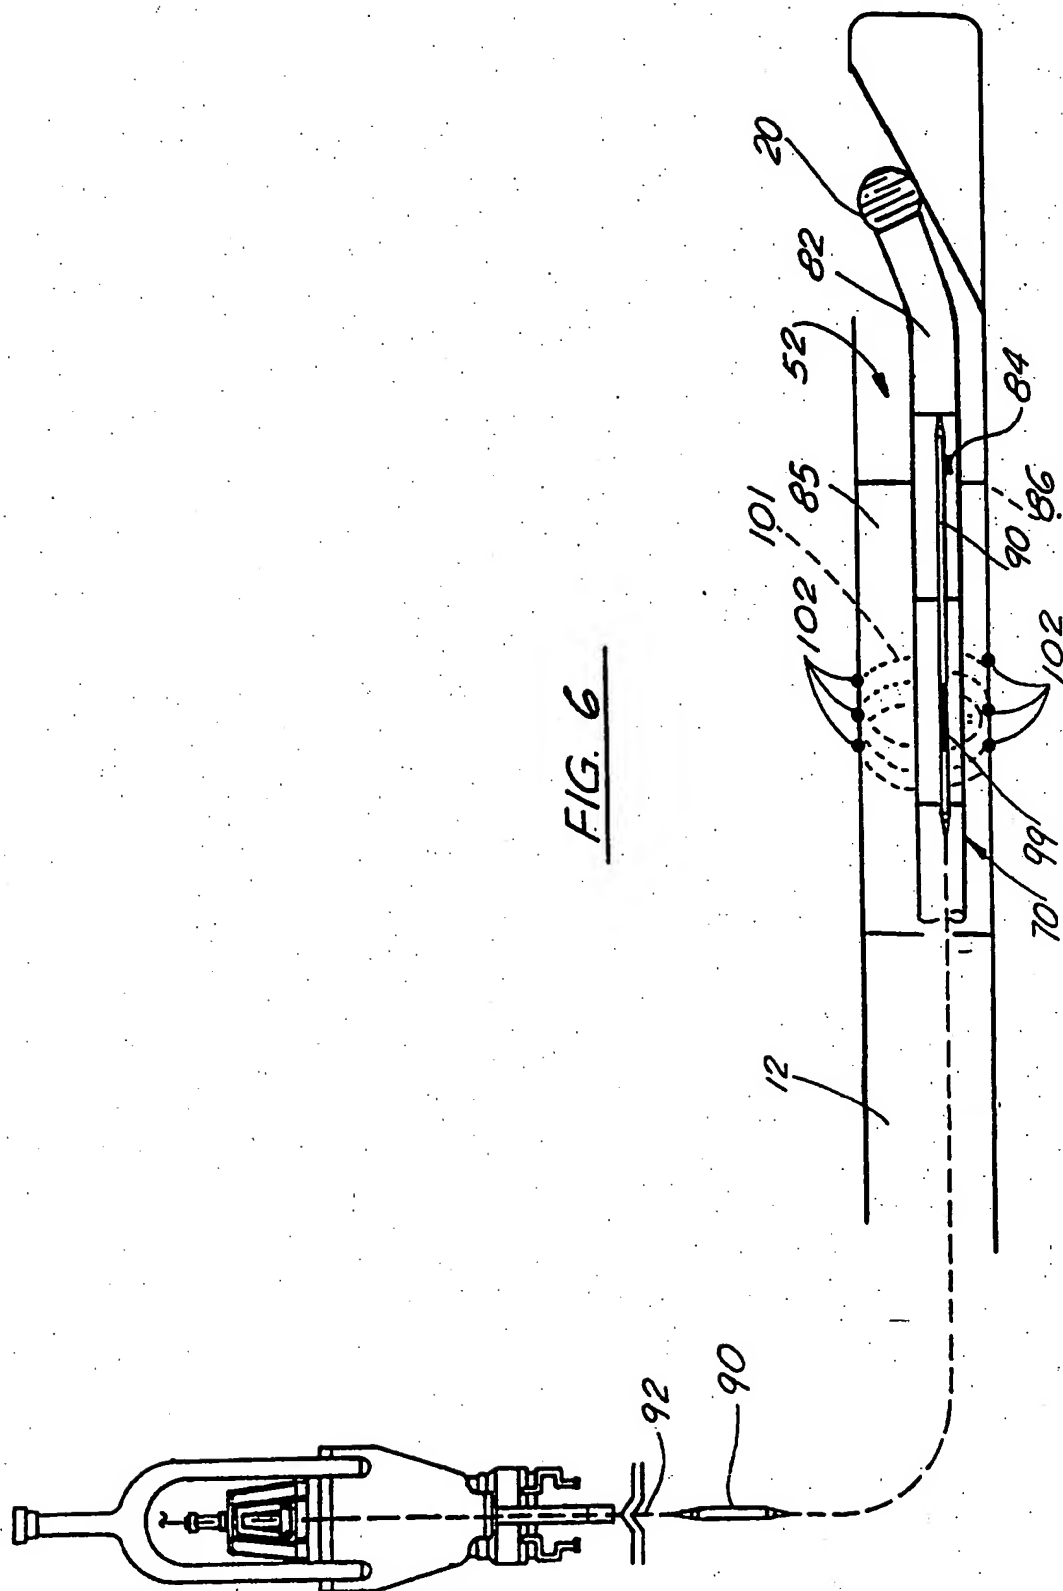


FIG. 6

6/7

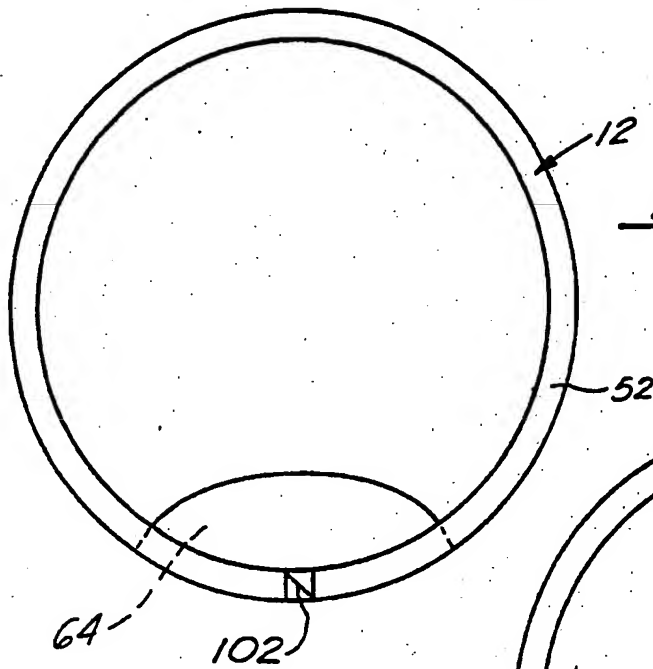


FIG. 7A

FIG. 7B

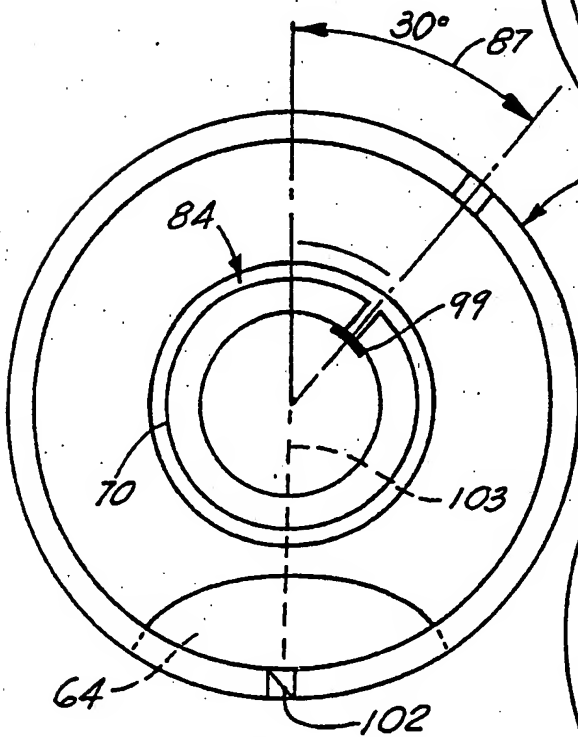
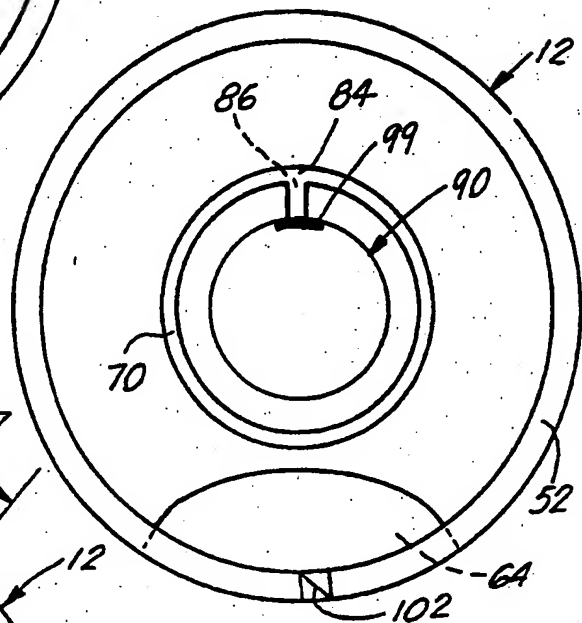


FIG. 7C

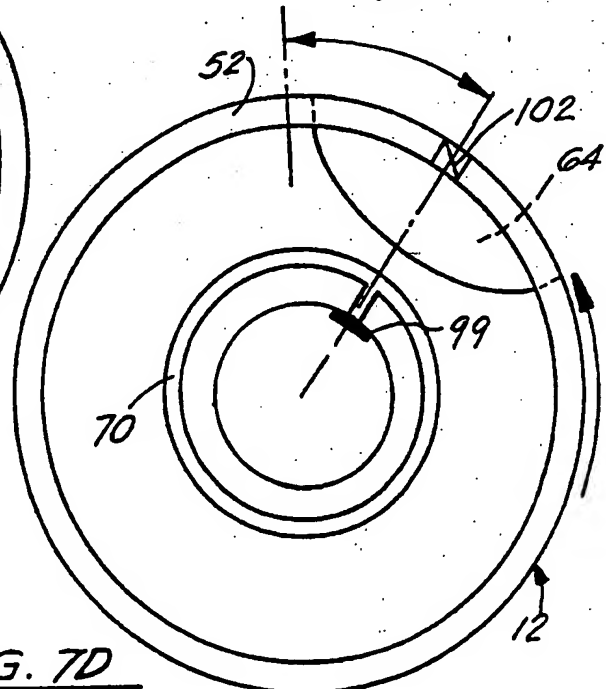


FIG. 7D

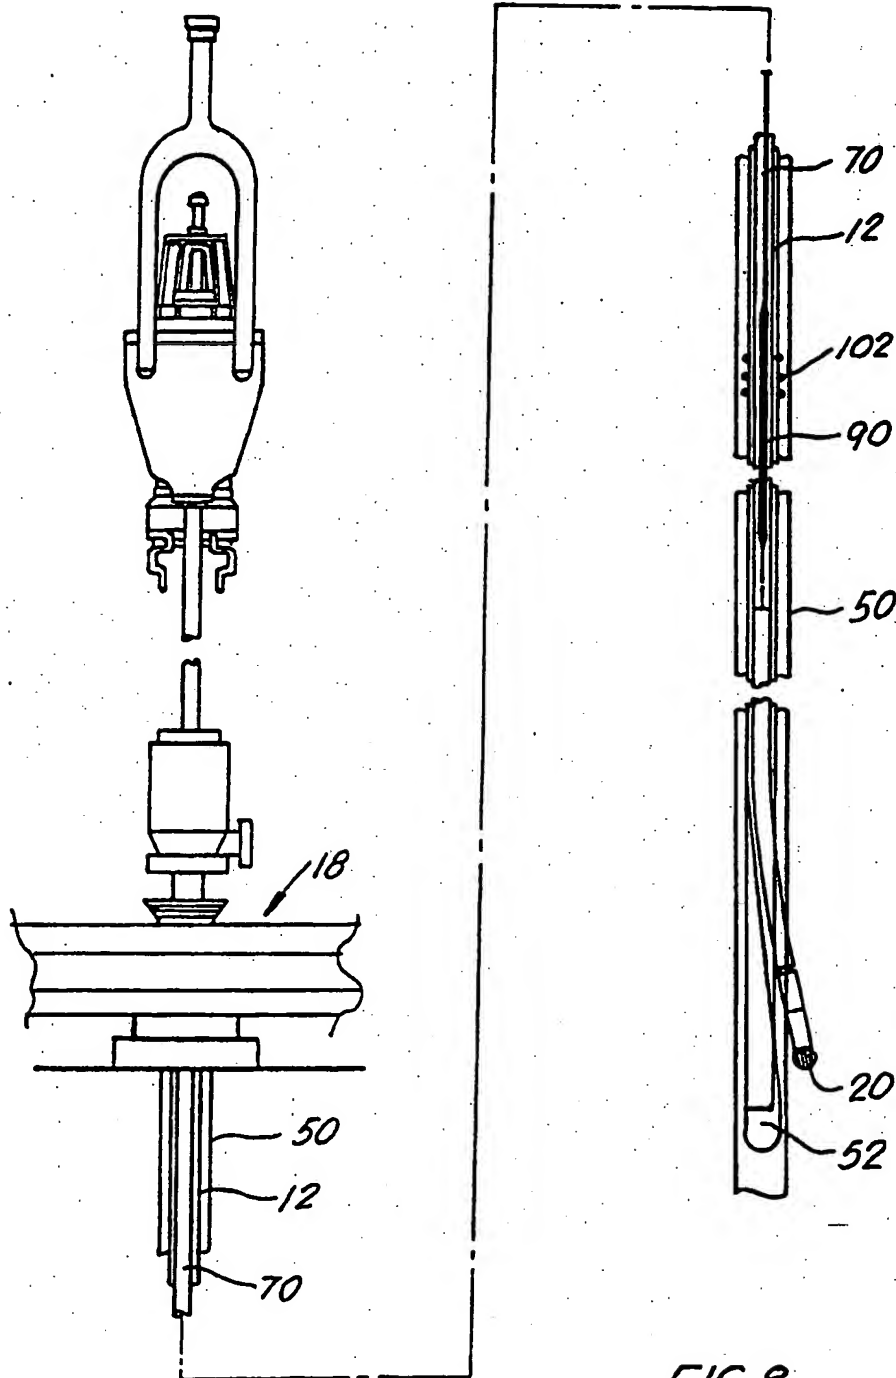


FIG. 8

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(S) : E21B 7/06, 47/024

US CL : 175/45, 73, 79

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 175/45, 73, 79, 61, 62, 75, 82

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
NONE**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,852,666 (BRUNET ET AL) 01 AUGUST 1989.	
A	US, A, 1,806,509 (STRAATMAN) 19 MAY 1931.	
A	SU, A, 796397 (PECORA PERTROL IND) 19 MARCH 1979.	
A	DE, A, 3708444 (KOPINECK) 29 SEPTEMBER 1988.	

<input type="checkbox"/> Further documents are listed in the continuation of Box C.	<input type="checkbox"/> See patent family annex.
<p>* Special categories of cited documents:</p> <p>*A* document defining the general state of the art which is not considered to be part of particular relevance</p> <p>*E* earlier document published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p>	<p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>*A* document member of the same patent family</p>
Date of the actual completion of the international search 12 August 1993	Date of mailing of the international search report 23 AUG 1993
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. NOT APPLICABLE	Authorized officer DAVID BAGNELL Telephone No. (703) 308-2168

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**